



## **BIKKEL 200 INSTALLATION MANUAL**

**PLEASE READ BEFORE INSTALLING THE BIKKEL**

**Wire the switch according to the required wiring diagram**

### **SET UP FOR PRESS BUTTON:**


- Press the press button switch and hold on full bright for 3 seconds
- Release
- Wait 5 seconds
- After the 5 seconds, press the switch 8 times ( not too fast – use the count as follows, one thousand, two thousand etc.)
- The light(s) will flash 3 times and go to the minimum setting of the driver circuitry
- If no light comes on wait, the Bikkel will add more current every 2 seconds until the light comes on. – be patient this may take some time depending on the bulb used.
- When the desired minimum setting is reached, press the switch once
- The lights will flash 3 times to let you know it has accepted the new minimum

**The Bikkel will now no longer DIM below this level**

### **SET UP FOR BABY LIGHT:**

- Select the brightness you want
- Press the switch twice (2 times).

This will start a 30 minute dim down to off

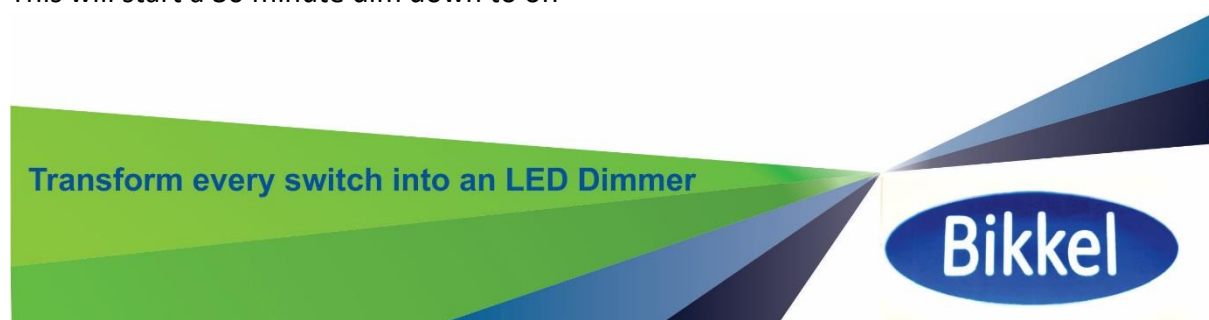



**SPECIFICATIONS:**

Standards	IEC 60669-1, IEC 60669-2-1, CE & LOA
Mains Voltage	220-240 AC at 50 Hz
Power	200 watts
Dimming Action	C / Trailing Edge
T ambient	-20 degrees C to +60 degrees C
Protection	Overload and Over temperature
Warranty	24 months

Transform every switch into an LED Dimmer

